

# FABRICS GROUP 3



# FELICITY - FABRIC "D"




100% RECYCLED POLYESTER / FLAME RETARDANT


GROUP  
3




64190 D11




68179 D14




61164 D21




67079 D16




66161 D13




66162 D18



60105 D15




60106 D22




60999 D12


ACTIU OFFERS THE POSSIBILITY OF REQUESTING FULL RANGE OF COLOURS OFFERED BY THE MANUFACTURER OF **GROUP D (FELICITY) UNDER SPECIFIC CONDITIONS**. TO REQUEST A FINISHED NOT INCLUDED IN THE STANDARD ACTIU OFFER, **PLEASE CONTACT THE SALES DEPARTMENT**.




60107




60108




61163



61165




61166




61167




62080




62081




63087




63088




63089




64189



64191




65102




65103




66163




66164




67080




67081



67082



67083



68178






### TECHNICAL SPECIFICATIONS GROUP D - FELICITY

Material	100% post-consumer recycled polyester	100%
Weight	lin. metre aprox. grams	430
Width	cm	140
Abrasion resistance	rubs - EN ISO 12947-2 (Martindale) double rubs wyzenbeek (ASTM D4157-07) (heavy duty upholstery)	90.000 100.000
Piling	scale 1-5, max. 5 - EN ISO 12945-2	5
Colour fastness to light	scale 1-8, max. 8 - EN ISO 105 - B02	5-7
Colour fastness to rubbing	scale 1-5, max. 5 - EN ISO 105X12 (wet/dry)	4-5/4-5
Cleaning	Wash or dry cleaning P (W) Felicity is made of polyester which is a material suited for environments with special requirements for cleaning.	
	40°C shrinkage máx. 1,5%.	
	60°C shrinkage máx. 2,5%.	
US ACT	ASTM D4157-07 Wyz abrasion (heavy duty) 100k ASTM D3511 Pilling AATCC 16 Light fastness AATCC 8 o 116 Wet/dry crocking CA TB 117-2013	PASS PASS PASS PASS PASS
Flammability	BS EN 1021 1&2 Cigarette and Match CA TB 117-2013 Will also pass other flammability standards. Contain no flame retardant chemical. Flame retardant performance is dependent upon the foam used and fireproof treatment.	
Certificates	Abrasion resistance - BS EN ISO 12947-2/14465 Breaking force - ASTM D5034 Breaking force Colour fastness to rubbing - BS EN ISO 105-X12 Pilling - BS EN ISO 12945-2 Seam slippage - BS EN ISO 13936-2 - ASTM D4034 Yarn slippage at a sewn seam Environment - Oeko-Tex - EU Ecolabel - Bronze Cradle to Cradle	

Subject to changes and colour differences

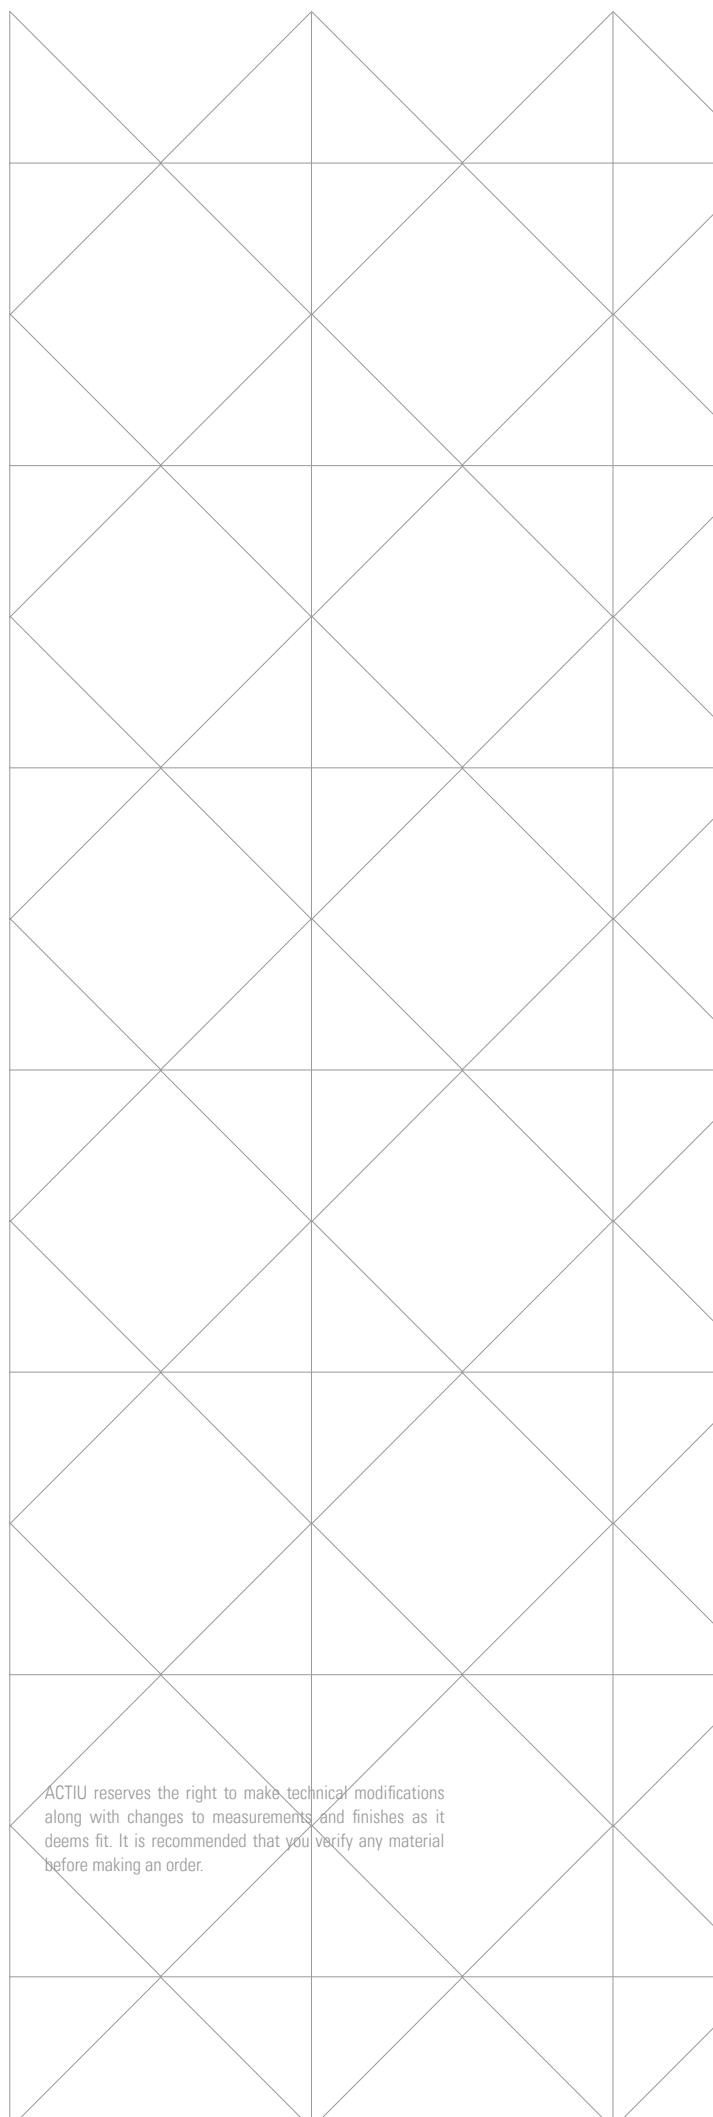

ACTIU reserves the right to make technical modifications along with changes to measurements and finishes as it deems fit. It is recommended that you verify any material before making an order.

