

FABRICS

GROUP

8



FABRIC "P"

100% FIRST QUALITY SELECTED LEATHER (COW GRAIN LEATHER)

GROUP
8



P18



P11




P10



TECHNICAL SPECIFICATIONS FABRIC "P"

Material	First quality selected leather (Cow grain leather)	100%
Finish	First quality leather semi-aniline (Chrome tanning)	100%
Thickness	mm	0,8-1,1
Tear resistance	DIN 53329	> 20 N
Bending resistance	DIN 53351	Min. 100.000
Grip Finish	IUF 470	min. 1,5N/10mm
pH of the aqueous excerpt	DIN 53312	> 3,5 N
Colour fastness to light	DIN 50004	5
Colour fastness to rubbing	DIN 53339 (wet/dry)	250 °C - 1000 °C
Cleaning	Wipe clean with neutral deterge.	
Flammability	BS 5852	

Subject to changes and colour differences

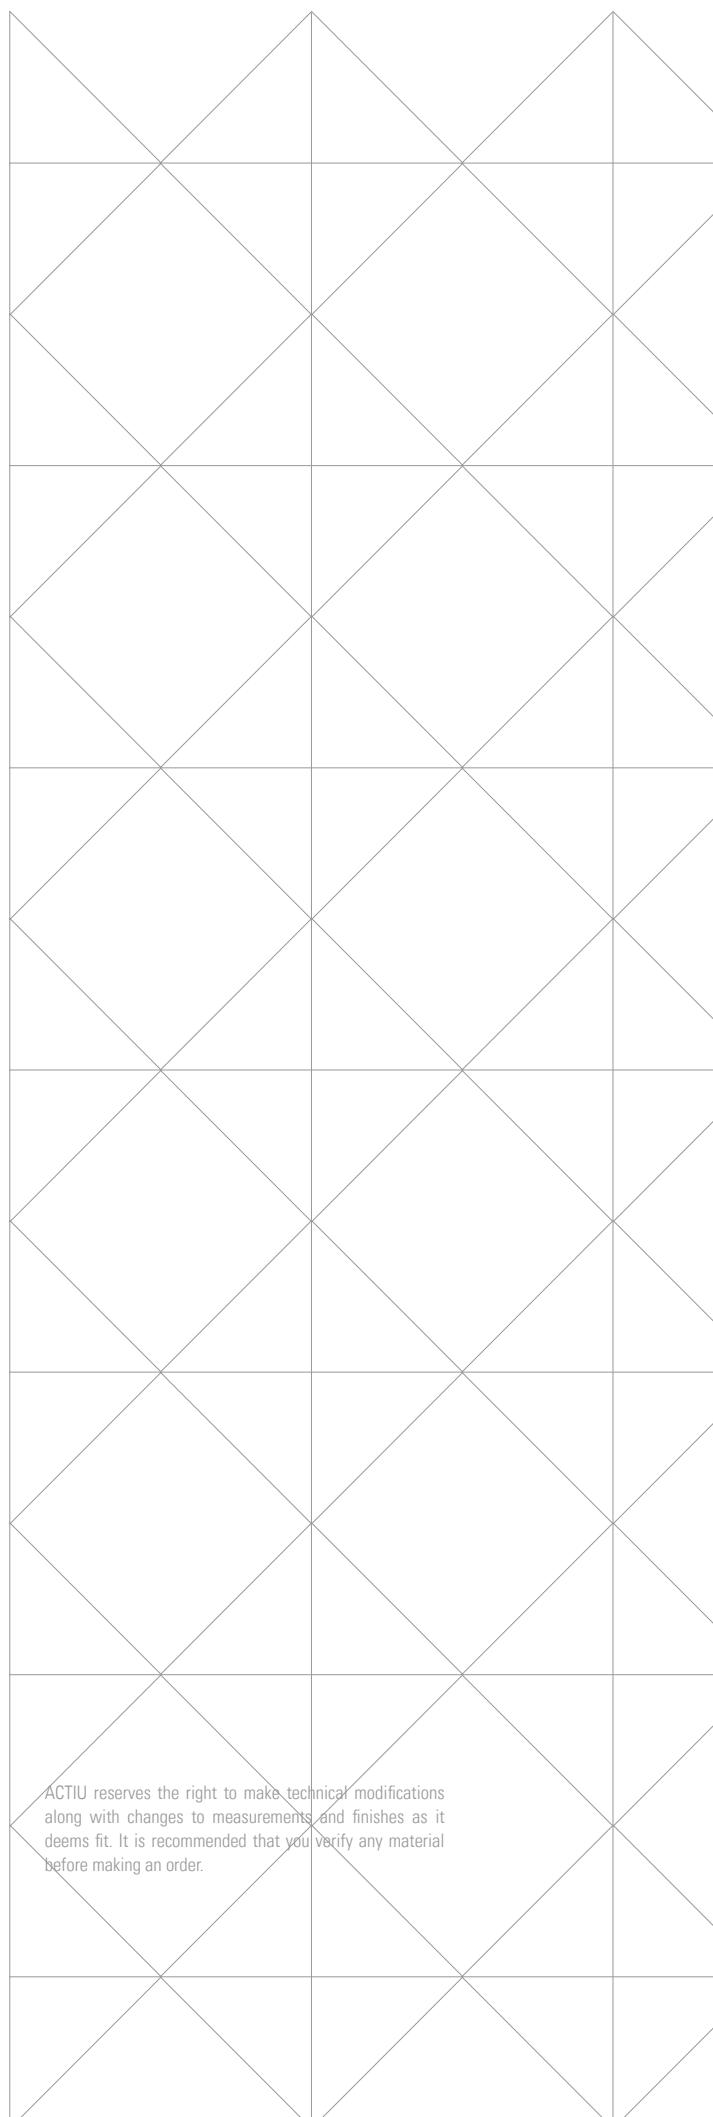

ACTIU reserves the right to make technical modifications along with changes to measurements and finishes as it deems fit. It is recommended that you verify any material before making an order.

